

Project: Gift Card Holders

DESIGNER: SHERRI K. FALLS (THISANDTHATPATTERNS.COM)



FABRICS are from the Morning Rush collection by Carol Eldridge for Andover Fabrics (andoverfabrics.com) and the Cut and Sew collection from Robert Kaufman Fabrics (robertkaufman.com).

Stitch gift-card holders that give a hint of what's inside.

## Project: Gift Card Holders

### Materials

- 5×7" rectangle print No. 1 (outer card keeper)
- 5×7" rectangle print No. 2 (lining)
- 5×7" rectangle heavy-duty iron-on fusible interfacing
- ¾" square hook-and-loop tape
- Buttons: ⅜"-diameter, ¼"-diameter

### Finished card keeper:

4×2⅞" (folded)

**Quantities** are for 100% cotton fabrics.

**Measurements** include ¼" seam allowances. Sew with right sides together unless otherwise stated.

### Cut Fabrics

Cut pieces in the following order. Pattern is on page 4.

#### From each print, cut:

- 1 of Card Keeper Pattern

#### From fusible interfacing, cut:

- 1 of Card Keeper Pattern

### Assemble Card Keeper

- 1.** Center and stitch loop part of hook-and-loop tape to right side of print No. 1 card keeper piece ½" from short straight edge (**Diagram 1**).
- 2.** Following manufacturer's instructions, fuse interfacing piece to wrong side of Step 1 unit to make outer card keeper.
- 3.** Center and stitch remaining part of hook-and-loop tape to right side of print No. 2 card keeper piece ½" from short rounded edge to make lining (**Diagram 2**).
- 4.** Sew together outer card keeper and lining, leaving a 2" opening along one long edge (**Diagram 3**).

- 5.** Trim corners and clip curves. Turn right side out through opening; press. Slip-stitch opening closed to make card keeper body.
- 6.** Fold short straight edge of card keeper body up 2" with lining inside (**Diagram 4**); topstitch as shown to secure fold and make pocket.
- 7.** Referring to photo, *page 1*, center and stack buttons on outer side of card keeper body about ⅛" from topstitched edge. Hand-stitch buttons in place.
- 8.** Fold short rounded edge over pocket to align hook-and-loop pieces (fold is about ½" from pocket opening). Crease fold to complete card keeper.

Project: Gift Card Holders



DIAGRAM 1

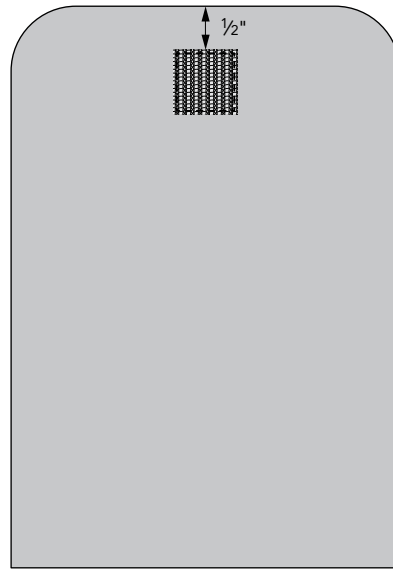


DIAGRAM 2


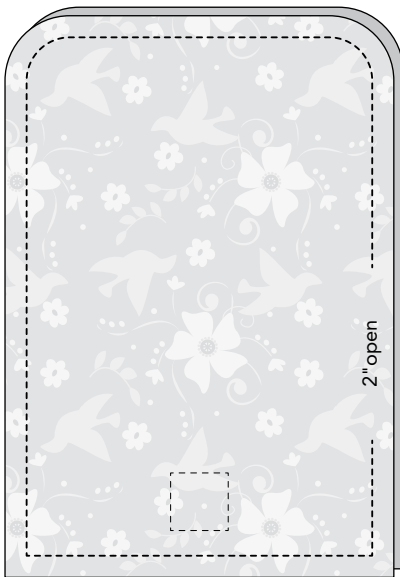


DIAGRAM 3




DIAGRAM 4

Project: Gift Card Holders

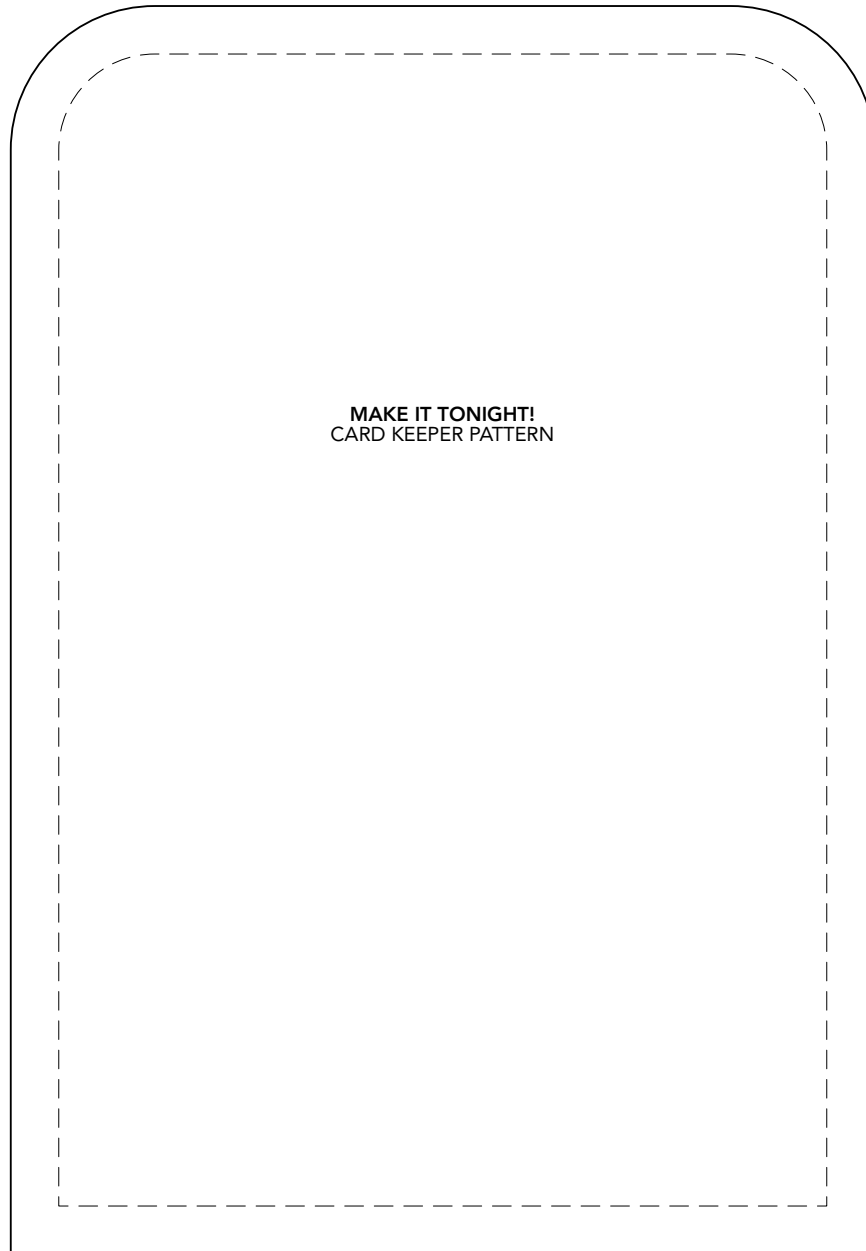

MAKE IT TONIGHT!  
CARD KEEPER PATTERN

This box should  
measure 1".



**\* NOTE:**

When printing a  
downloadable pdf, set Page  
Scaling preference to NONE  
to print patterns at 100%.  
Do NOT "Shrink to Fit"  
or "Fit to Printable Area."